


24 VDC coil with ISO/DIN 43650, Form A connector

Model:
770-224N

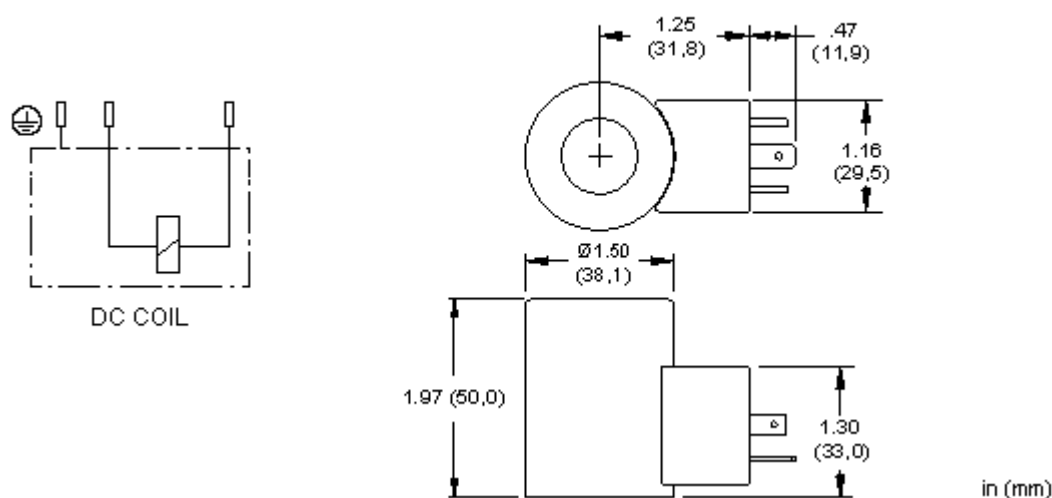

Technical Features

- This DC coil does not include a TVS surge suppression diode. Coils without TVS diodes should only be used when surge suppression is included elsewhere in the electrical system.
- Coil windings utilize Class N, (392° F [200 °C] rated) magnet wire.
- The external steel shell is zinc plated with black dichromate.
- RoHS compliant. Restricted materials less than 0.1% total by weight.
- For optimum proportional performance, an amplifier with current sensing and adjustable dither should be used. Dither should be adjustable between 100 - 250 Hz.
- This coil is CE compliant. It meets the requirements of the Low Voltage Directive (2006/95/EC) and EN 60204-1:2006.
- IP rating is dependent on the coil connector and the mating connector used.
- Power cable with mating connector is required and is not included with product.

Technical Data

	U.S. Units	Metric Units
Arc Suppression	Standard	
Maximum Ambient Temperature	122 °F	50 °C
Maximum Coil Temperature at 68°F (20°C) Ambient	218°F (105°C)	
Power Consumption (cold) - at rated voltage	22 watts	
Voltage/Frequency	24 VDC	
Operating Voltage Range	+/- 10% nominal	

Duty cycle Rating	100 %	
Connector	ISO/DIN 43650A, Form A	
Connector Environment Rating	IP65/IP67	
Solenoid Tube Diameter	.75 in.	19 mm
Coil Nut Torque	4.5 lbf in.	0,5 Nm
Model Weight	0.51 lb.	0.23 kg.

Proportional Performance Data

	U.S. Units	Metric Units
Maximum Current	590 mA	
Nominal Coil Resistance at 122°F (50°C) Stabilized	37.2 ±5% ohms	
Nominal Coil Resistance at 68°F (20°C) Cold	26.2 ±5% ohms	

770-224N**What models can this kit be used on?**

DAAL	DLDAS	DMDAS	DNDAS	DTCAS	FMDA	HDDAS	PSDL
DAALS	DLDAZ	DMDAZ	DNDC	DTCAZ	FMDB	PRDL	PSDP
DBAL	DLDX	DNCA	DNDY	DTDA	FPCC	PRDM	RBAN
DBALS	DLDXS	DNCAZ	DNDYS	DTDAS	FPCH	PRDN	RBAP
DLDA	DMDA	DNDA	DTCA	DWDA	HDDA	PRDP	

Instructions/Notes

- No Special Notes Available for selected model.