


24 VDC coil with twin leads

Model:
770-724N

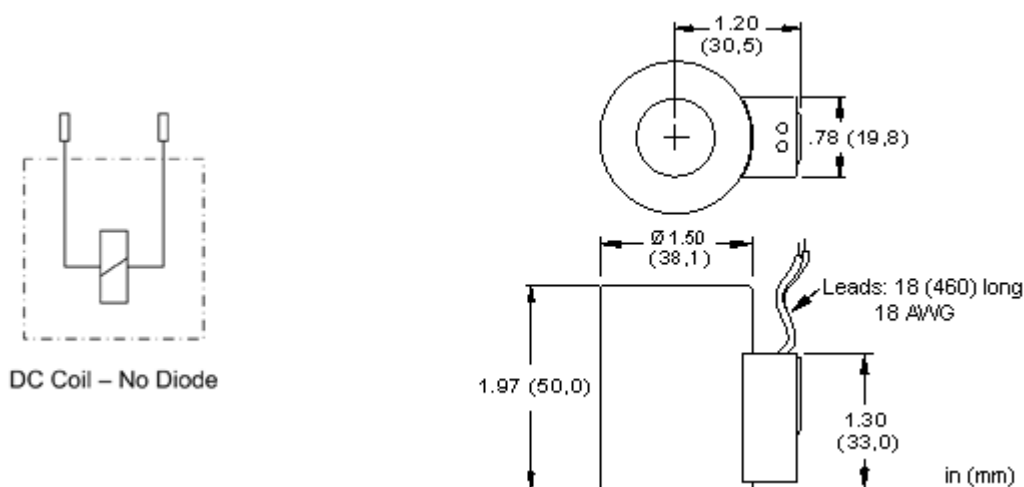

Technical Features

- This DC coil does not include a TVS surge suppression diode. Coils without TVS diodes should only be used when surge suppression is included elsewhere in the electrical system.
- Coil windings utilize Class N, (392° F [200 °C] rated) magnet wire.
- IP rating is dependent on the coil connector and the mating connector used.
- For optimum proportional performance, an amplifier with current sensing and adjustable dither should be used. Dither should be adjustable between 100 - 250 Hz.
- The external steel shell is zinc plated with black dichromate.
- RoHS compliant. Restricted materials less than 0.1% total by weight.

Technical Data

	U.S. Units	Metric Units
Arc Suppression	Standard	
Maximum Ambient Temperature	122 °F	50 °C
Maximum Coil Temperature at 68°F (20°C) Ambient	218°F (105°C)	
Power Consumption (cold) - at rated voltage	22 watts	
Voltage/Frequency	24 VDC	
Operating Voltage Range	+/- 10% nominal	
Duty cycle Rating	100 %	
Connector	Twin lead 18 AWG x 18 in. (460 mm)	
Connector Environment Rating	IP65	
Solenoid Tube Diameter	.75 in.	19 mm

Coil Nut Torque	4.5 lbf in.	0,5 Nm
Model Weight	0.53 lb.	0.24 kg.

Proportional Performance Data

	U.S. Units	Metric Units
Maximum Current	590 mA	
Nominal Coil Resistance at 122°F (50°C) Stabilized	37.2 ±5% ohms	
Nominal Coil Resistance at 68°F (20°C) Cold	26.2 ±5% ohms	

770-724N

U.S. Dollar ▼

Recommended List Price

Shipping and Discount Terms

What models can this kit be used on? ([Click Here](#))

DAAL	DLDAS	DMDAS	DNDAS	DTCAS	FMDA	HDDAS	PSDL
DAALS	DLDAZ	DMDAZ	DNDC	DTCAZ	FMDB	PRDL	PSDP
DBAL	DLDX	DNCA	DNDY	DTDA	FPCC	PRDM	RBAN
DBALS	DLDXS	DNCAZ	DNDYS	DTDAS	FPCH	PRDN	RBAP
DLDA	DMDA	DNDA	DTCA	DWDA	HDDA	PRDP	

Related Information

Environmental Test Specification, S-367 in pdf format

Instructions/Notes

- No Special Notes Available for selected model.