


Series P - T-8A cavity, buna-N, cartridge, and coil seal kit

Model:
990-208-007

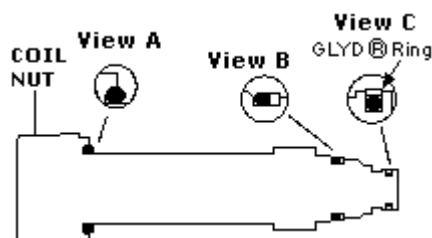

Technical Features

- The shelf life for a Buna-N cartridge seal kit is ten years from date of purchase. This date will be printed on the kit packaging.

Cartridge Installation Data

	U.S. Units	Metric Units
Cavity		T-8A
Cartridge Thread		M16
Valve Hex Size	7/8 in.	22,2 mm
Valve Installation Torque	20 - 25 lbf ft	27 - 33 Nm

990-208-007

What models can this kit be used on?

RBAN

RBAP

Display Components

	Description	Quantity	View
500-002-014	O-Ring	1	B
500-051-300	O-Ring	1	C
500-101-116	O-Ring	1	A
515-002-014	Backup Ring	1	B
530-052-300	Glyd Ring	1	C
999-208-007	Literature	1	
375-025	Nut	1	

Instructions/Notes

- Install back-up rings and O-rings as shown in views.
- When installing continuous back-up rings, use the same technique and the same care used to install O-rings.
- After installing the GLYD® Ring, size it to restore original shape and to prevent damage during cartridge installation.
- When installing cartridge - be sure to torque to recommended value.
- GLYD® Ring is a registered trademark of W. S. Shamban and Co., Los Angeles, CA, USA