




Series 4 - T-18A cavity, Viton, cartridge seal kit

Model:
990-318-007

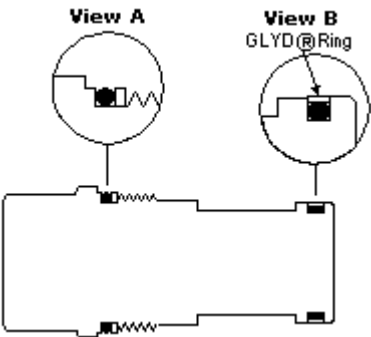

Technical Features

- The shelf life for a Buna-N cartridge seal kit is ten years from date of purchase. This date will be printed on the kit packaging.

Cartridge Installation Data

	U.S. Units	Metric Units
Cavity		T-18A
Cartridge Thread		M48
Valve Hex Size	1 5/8 in.	41,3 mm
Valve Installation Torque	350 - 375 lbf ft	475 - 500 Nm

990-318-007

What models can this kit be used on?

RDJA RDJF RPKS RPKS8 RPKT

Display Components

	Description	Quantity	View
500-001-126	O-Ring	1	B
500-002-131	O-Ring	1	A
515-002-131	Backup Ring	1	A
530-102-127	Glyd Ring	1	B
999-019-077	Literature	1	

Instructions/Notes

- Install back-up rings and O-rings as shown in views.
 - When installing continuous back-up rings, use the same technique and the same care used to install O-rings.
 - After installing the GLYD® Ring, size it to restore original shape and to prevent damage during cartridge installation.
 - When installing cartridge - be sure to torque to recommended value.
 - GLYD® Ring is a registered trademark of W. S. Shamban and Co., Los Angeles, CA, USA
-
-