

Normally closed, balanced poppet, logic element - pressure adjustable

Capacity:
120 gpm (480 L/min.)

Functional Group:



Products : Cartridges : Logic Element : Balanced Poppet : Normally Closed, Pressure Adjustable

Model:

DKJP

Product Description

This is a normally closed, balanced poppet, switching element. When pilot pressure is applied to port 3, the poppet remains closed until the pilot pressure reaches the setting established by the integral pilot relief stage, at which point the poppet shifts to the open position.

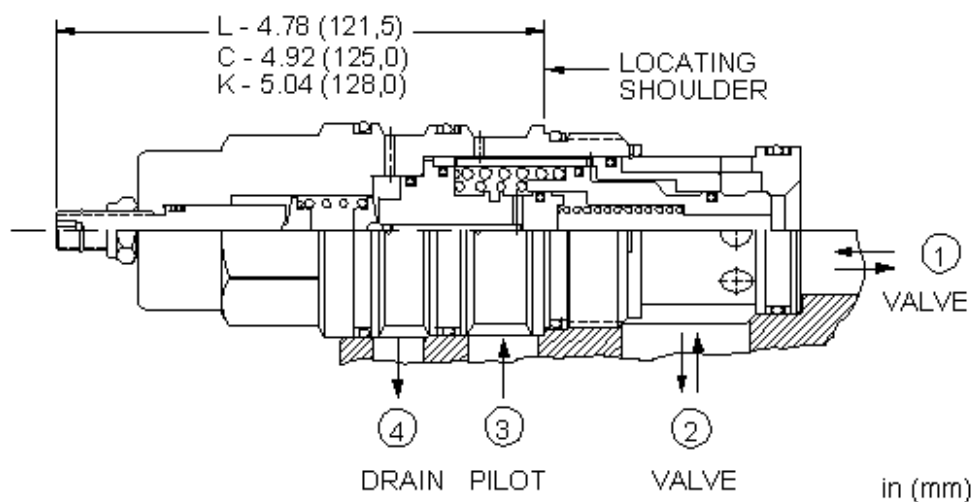
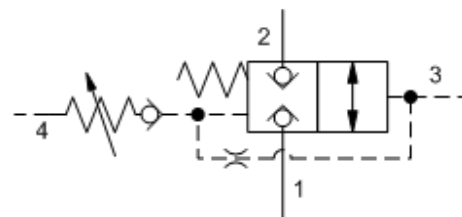


Technical Features

- Unique balanced construction provides predictable switching with 5000 psi (350 bar) at both port 1 and port 2. When the remote pressure signal at port 3 exceeds the internal valve setting, the valve shifts to the open position.
- Port 1 and port 2 are fully sealed from port 3 and port 4. Ports 3 and 4 are positively sealed.
- Leakage rate between port 1 and port 2 is very low, typically less than 10 drops/min. at 5000 psi (0,7 cc/min at 350 bar).
- Any backpressure at the drain port is directly additive to the valve setting.
- Valve will reseal when the pilot pressure falls to 85% of the cracking value.
- All ports will accept 5000 psi (350 bar).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-24A	
Capacity	120 gpm	480 L/min.
Minimum Pilot Pressure Required to Shift Valve	300 psi	20 bar
Control Pilot Flow	15 - 30 in ³ /min.	0,25 - 0,50 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	10 drops/min.@5000 psi	0,7 cc/min.@350 bar
Series (from Cavity)	Series 4	
Valve Hex Size	1 5/8 in.	41,3 mm
Valve Installation Torque	350 - 375 lbf ft	475 - 500 Nm
Adjustment Screw Internal Hex Size	5/32 in.	4 mm
Adjustment Locknut/Cap Hex Size	9/16 in.	15 mm
Adjustment Nut Torque	80 - 90 lbf in.	9 - 10 Nm
Seal Kits - Cartridge	Buna: 990-024-007	
Seal Kits - Cartridge	Viton: 990-024-006	
Model Weight	3.78 lb.	1.71 kg.

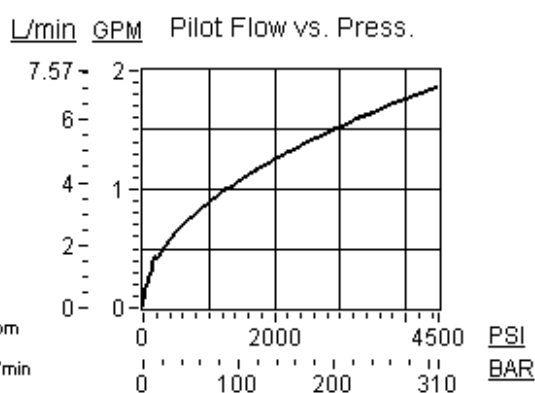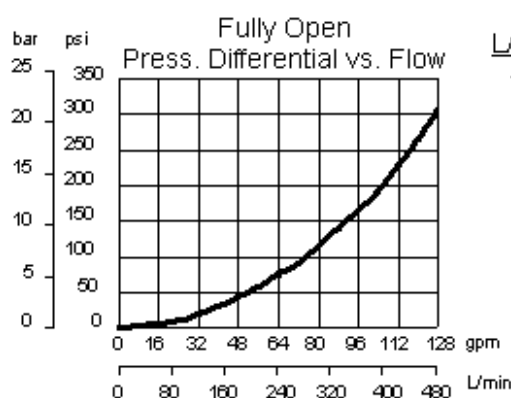**DKJP-LAN****Control****Adjustment Range****Seal Material****Material/Coating Modifier****Standard Options**

- C*** Tamper Resistant - Factory Set
K Handknob
L Standard Screw Adjustment

Standard Options

- A** 200 - 3000 psi (14 - 210 bar), 1000 psi (70 bar) Standard Setting
B 200 - 1500 psi (14 - 105 bar), 1000 psi (70 bar) Standard Setting
W 200 - 4500 psi (14 - 315 bar), 1000 psi (70 bar) Standard Setting

Standard Options

- N** Buna-N
V Viton

Preferred Options

No modifier (standard material with no special coating)
Special Options

/AP Stainless Steel, Passivated

Control: L

Our corrosion resistant product line is growing! If you are interested in a corrosion resistant option for this model, please contact Sun.

Additional Options

- D** 200 - 800 psi (14 - 55 bar), 400 psi (28 bar) Standard Setting

Seal Material

When the modifier is /AP, the control must be L

* Special Setting required, specify at time of order
 Customer specified setting stamped on hex.

Related Documents:

- [Explanation of Sun cartridge control options - US units.](#)
- [Explanation of Sun cartridge control options - metric units.](#)