





Ventable, fixed orifice, bypass/restrictive, priority, flow control valve

Capacity:
12 gpm (45 L/min.)

Model:
FVDA

Product Description

Ventable, bypass/restrictive, fixed-orifice, priority flow controls take an input flow at port 1 and use it to satisfy the priority flow at port 3. If the input flow exceeds the priority flow requirement, the excess is bypassed out port 2. The bypass flow may be used in a secondary circuit. A vent port (port 4) allows these valves to be controlled remotely.

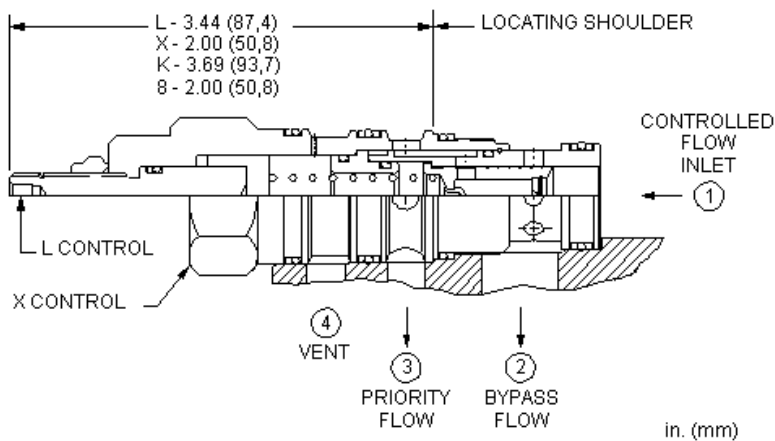


Technical Features

- Customer must specify a flow rating. Factory set flow ratings are within +/- 10% of the requested setting.
- Using a pressure control on port 4 will limit the pressure at the priority port (port 3). If pressure on the bypass port (port 2) exceeds the setting of the pressure control, priority flow will be shut off and all the flow will go out the bypass port.
- Maximum pressure at port 3 should be limited to 3000 psi (210 bar).
- Both priority and bypass flow are usable up to the system operating pressure.
- Priority remains relatively constant regardless of variation in input flow.
- Bypass flow is not available until priority flow requirements are satisfied, except when the valve is vented. When port 4 (vent) is open, all flow diverts to port 2 if pressure at port 1 (inlet) is 150 psi (10,5 bar) or higher.
- Pressure at the bypass port (port 2) may exceed pressure at the priority port (port 3).
- The sharp-edged orifice design minimizes flow variations due to viscosity changes.
- A tuneable adjustment control option provides up to +/- 25% variation from the nominal factory pre-set flow. Adjustment is done with +/- 3 turns of the adjust screw. Screw in (CW) to increase flow.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity		T-22A

Capacity	12 gpm	45 L/min.
Maximum Input Flow	30 gpm	120 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Nominal Vent Flow	46 in ³ /min.	0,75 L/min.
Series (from Cavity)	Series 2	
Valve Hex Size	1 1/8 in.	28,6 mm
Valve Installation Torque	45 - 50 lbf ft	60 - 70 Nm
Adjustment Screw Internal Hex Size	5/32 in.	4 mm
Adjustment Locknut/Cap Hex Size	9/16 in.	15 mm
Adjustment Nut Torque	80 - 90 lbf in.	9 - 10 Nm
Seal Kits - Cartridge	Buna: 990-022-007	
Seal Kits - Cartridge	Viton: 990-022-006	
Model Weight	0.60 lb.	0.27 kg.

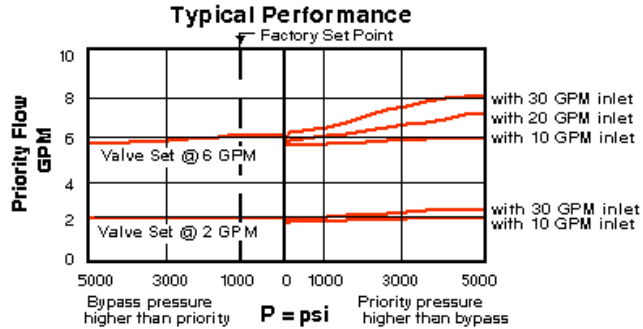

FVDA-XAN

Control	Setting Range	Seal Material
Standard Options	Standard Options	Standard Options
L Tuning Adjustment	A* Replaceable Orifice .1 - 12 gpm (0,4 - 45 L/min.)	N Buna-N
X Not Adjustable		V Viton
Additional Options		
Control	Setting Range	Seal Material
	B* Permanent Orifice .1 - 12 gpm (0,4 - 45 L/min.)	

* Special Setting required, specify at time of order