

Ports:

1, 2 = G1 1/4"

3 = G3/4"

4, $G = G1/4''$


Other flow ranges / drawings:

Serie 1 - 23lpm - L02654



Serie 2 - 45lpm - L02656

Serie 3 - 95lpm - L02658*


Serie 4 - 200lpm - L02660

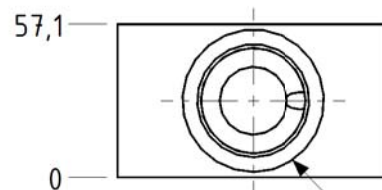

Port 1 G1 1/4"

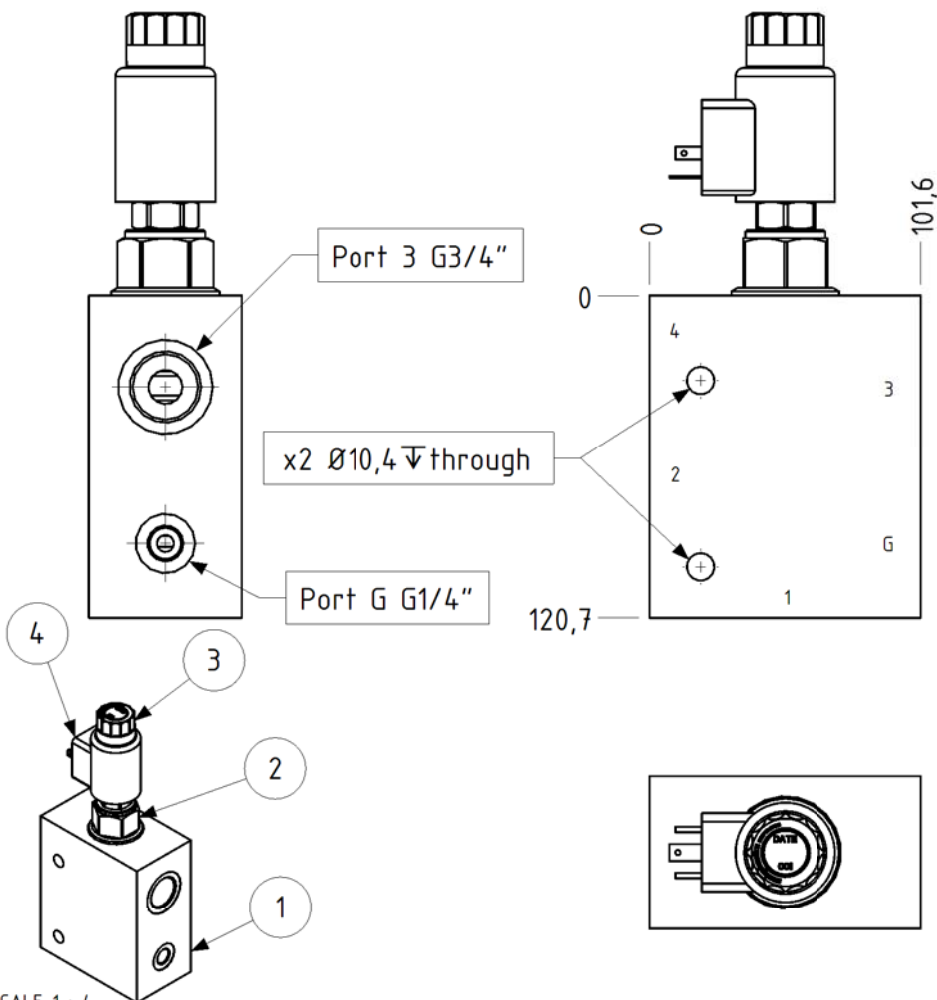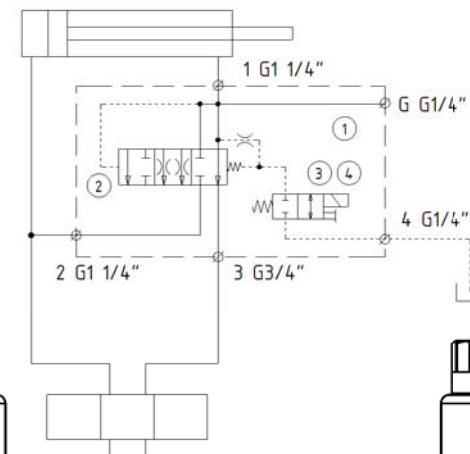

SCALE 1 : 4

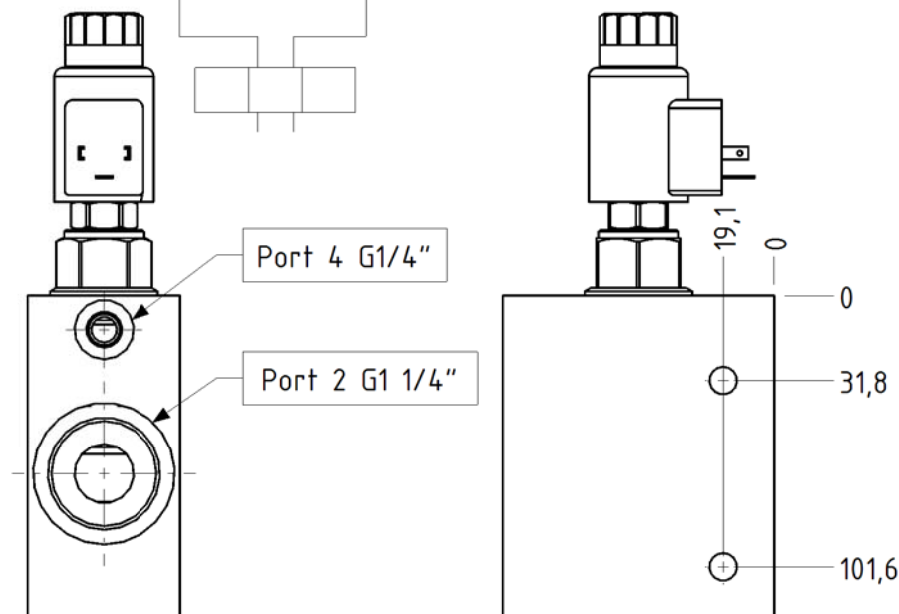

Pos. 4 can be exchanged to another voltage and/or contact type (i.e Deutsch)

Pos. 3 can be exchanged to normally open and/or soft shift version

4	1	770-224	Solenoid 770-224 24 VDC			270-0006	0,3	0,5 Nm	
3	1	DAAL-MCN	Directional valve T-8A			260-0045	0,21	35-40 Nm	
2	1	FVEA-8IN T-23A	Prioritetsventil ventstyd			213-0334	0,6	215 Nm	
1	1	PAY/S T-23A	Ventilhus G11/4"			223-1214	3,5	2 x M10	
#	Qty	Part Number	Description			Hydnet art nr	[kg]	Installation	
ISO 2768-1 Medium, Ra=3,2µm □ Stamp framed text on surface, height = 4mm. Sharp edges chamfered.		Material SG Iron	Heat treat, finish -	Status RELEASED		Dimensions ~121x102x57	Block -	Hydnet art nr -	
				Design OBD	Drawn OBD	Check PIL	Net. weight ~5 kg	See drawing 3D02657	
	HYDNET ab =	First angle projection 	Depth 	Title Regenerativ krets Serie 3 95lpm, elstyd			Scale 1:2	Size A3	Created date 2011-09-13
							Drawing L02658.icd		