

Normally open, modulating element

Capacity:
120 gpm (480 L/min.)

Functional Group:



Products : Cartridges : Logic Element : Modulating : Normally Open

Model:

LPJC

Product Description

Normally open modulating elements without an internal orifice act as a restrictive compensator to maintain a constant pressure drop across an orifice, regardless of variations in upstream or downstream pressure.

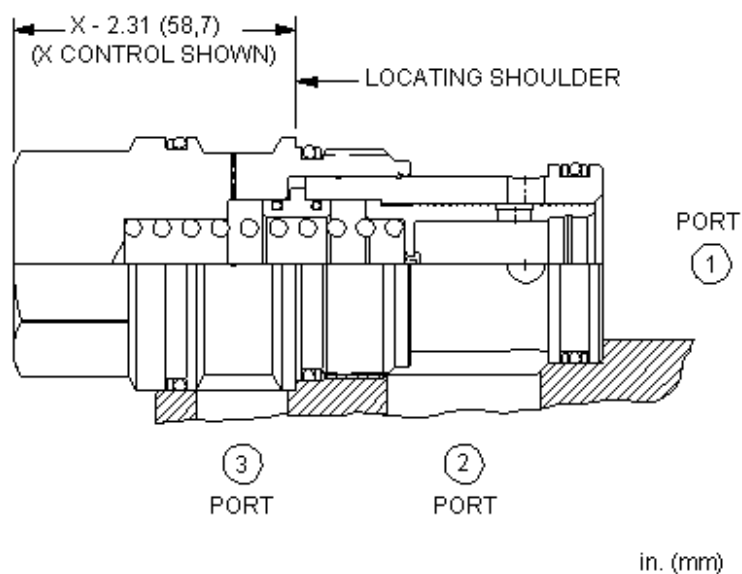



Technical Features

- If a higher compensating pressure is needed consider using a direct-acting reducer; PR*R.
- Corrosion resistant cartridge valves are intended for use in corrosive environments and are identified by the model code suffix /AP (see Option Selection below). The bodies of these valves are made from high strength lean duplex stainless steel. Adjustment screws are made from titanium or silicon brass, depending on the model. Lock nuts, retaining wires, and assorted controls are made from 316 stainless steel. Internal parts are made from carbon steel leaded alloy, the same as standard valves.
- All ports will accept 5000 psi (350 bar).
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity	T-19A	
Capacity	120 gpm	480 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)	Series 4	
Valve Hex Size	1 5/8 in.	41,3 mm
Valve Installation Torque	350 - 375 lbf ft	475 - 500 Nm
Seal Kits - Cartridge	Buna: 990-019-007	
Seal Kits - Cartridge	Viton: 990-019-006	
Model Weight	2.57 lb.	1.17 kg.

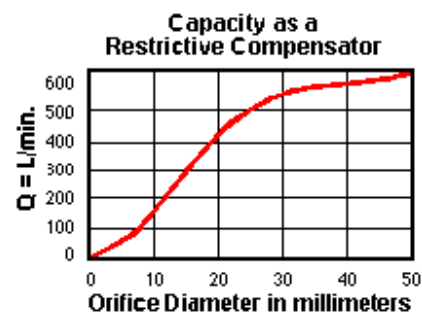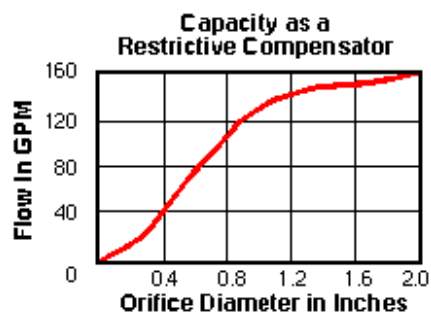**LPJC-XHN****Control****Differential Pressure****Seal Material****Material/Coating Modifier****Standard Options****Standard Options****Standard Options****Preferred Options**

P External 1/4 NPTF Pilot Port,
Port 3 Blocked

X Not Adjustable

D 50 psi (3,5 bar)

F 100 psi (7 bar)

G 150 psi (10,5 bar)

H 200 psi (14 bar)

N Buna-N

V Viton

No modifier (standard material
with no special coating)

Special Options

/AP Stainless Steel, Passivated

Control: X

Our corrosion resistant product line is growing! If you are interested in a corrosion resistant option for this model, please contact Sun.

When the control is L, the range must be D

When the control is P, the range must be F,G or H

When the control is X, the range must be D,F,G or H

When the modifier is /AP, the control must be X