



Normally closed, modulating element

Capacity:
30 gpm (120 L/min.)

Functional Group:



Products : Cartridges : Logic Element : Modulating : Normally Closed

Model:

LRFC

Product Description

Normally closed modulating elements without an internal orifice act as a bypass compensator to maintain a constant pressure drop across an orifice, regardless of variations in upstream or downstream pressure.

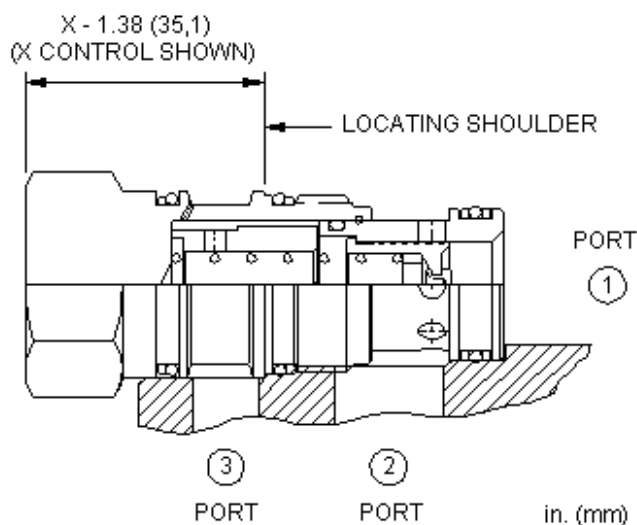

Technical Features

- All ports will accept 5000 psi (350 bar).
- Corrosion resistant cartridge valves are intended for use in corrosive environments and are identified by the model code suffix /AP (see Option Selection below). The bodies of these valves are made from high strength lean duplex stainless steel. Adjustment screws are made from titanium or silicon brass, depending on the model. Lock nuts, retaining wires, and assorted controls are made from 316 stainless steel. Internal parts are made from carbon steel leaded alloy, the same as standard valves.
- Incorporates the Sun floating style construction to minimize the possibility of internal parts binding due to excessive installation torque and/or cavity/cartridge machining variations.

Technical Data

	U.S. Units	Metric Units
Cavity		T-2A
Capacity	30 gpm	120 L/min.
Maximum Operating Pressure	5000 psi	350 bar
Series (from Cavity)		Series 2
Valve Hex Size	1 1/8 in.	28,6 mm
Valve Installation Torque	45 - 50 lbf ft	60 - 70 Nm
Seal Kits - Cartridge		Buna: 990-202-007
Seal Kits - Cartridge		Viton: 990-202-006
Model Weight	0.50 lb.	0.23 kg.

LRFC-XHN**Control****Differential Pressure****Seal Material****Material/Coating
Modifier****Standard Options****Standard Options****Standard Options****Preferred Options****X** Not Adjustable

D 50 psi (3,5 bar)
F 100 psi (7 bar)
G 150 psi (10,5 bar)
H 200 psi (14 bar)

N Buna-N
V Viton

No modifier (standard material with no special coating)**Special Options****/AP** Stainless Steel, Passivated

Control: X

Our corrosion resistant product line is growing! If you are interested in a corrosion resistant option for this model, please contact Sun.

Additional Options**Control****Differential Pressure****G** Slow Acting Pilot**E** 75 psi (5 bar)

When the modifier is /AP, the control must be X